


Solar Module

Solar-Fabrik Series SF 130/2

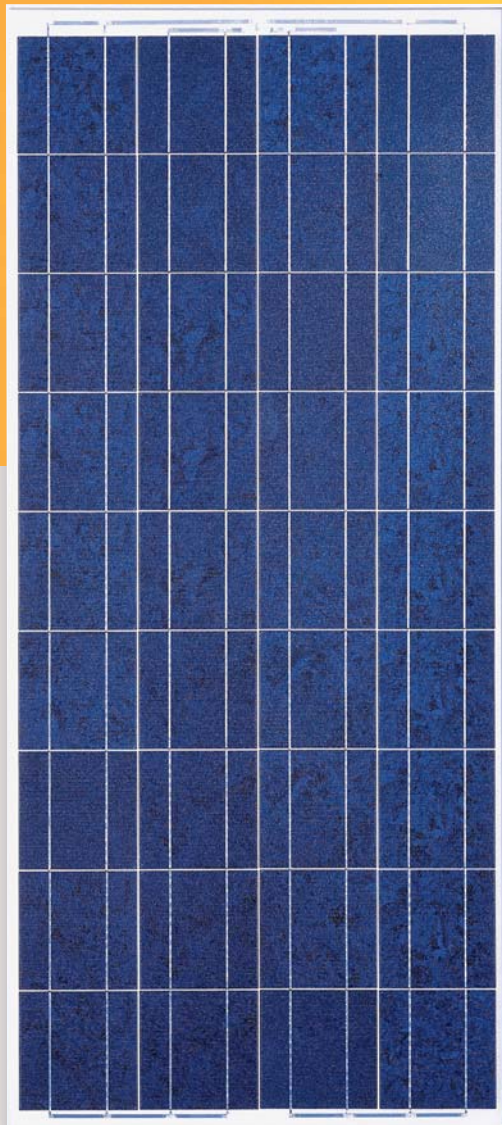

Top quality across the entire range:

- Long term stability by use of highly transparent, specially doped solar glass with UV blocker.
- 100% preselection of cells
- Highest energy output achieved by careful processing and exact tuning of components (cp. „Power Check“ Report, Fraunhofer ISE)
- State of the art manufacturing technology and certified quality management (ISO 9001) guarantee best quality of products „made in Germany“.
- Optionally available with specially developed aluminium frame; rapid and versatile fitting with patented Profilink mounting system; recessed retaining elements for attractive appearance
- Increased load capacity: 5400 Pa according to IEC 61215 for framed modules
- Very narrow selection limits of only +/- 2.5 W (Δ 1.9%) remove the need to preselect panels.
- Calibration modules for output measurement regularly tested at Fraunhofer Institute for Solar Energy Systems

Dimensions

Series SF 130/2	frameless	Alu frame
L x W (mm)	1485 x 663	1491 x 669
Thickness (mm)	5	35
Weight (kg)	10,5	12,5

Qualifications/Certificate

EN IEC 61215 ed. 2
Class II protection
Guideline 89/336/EWG (CE)
Guideline 73/23/EWG (CE)



Module data Solar-Fabrik Series SF 130/2

Type of module	SF 130/2-125	SF 130/2-130	SF 130/2-135
Solar cells per module (polycrystalline)	36	36	36
Max. system voltage	1000 V	1000 V	1000 V

Electrical data under STC (Standard Test Conditions: 1000 W/m², 25°C, AM 1.5)

Nominal Power*	P _{max}	125 W	130 W	135 W
Sorting limits		+/- 2.5 W	+/- 2.5 W	+/- 2.5 W
Voltage approx.	V _{MPP}	17.50 V	1.72 V	17.94 V
Open circuit voltage approx.	V _{OC}	21.53 V	21.69 V	21.86 V
Current approx.	I _{MPP}	7.14 A	7.34 A	7.52 A
Short circuit current approx.	I _{SC}	7.84 A	7.96 A	8.08 A

Electrical data at 800 W/m², NOCT, AM 1.5

Performance at MPP approx.	P _{max}	89 W	100 W	104 W
Voltage approx.	V _{MPP}	16.03 V	16.24 V	16.45 V
Open circuit voltage approx.	V _{OC}	19.69 V	19,85 V	20.00 V
Current approx.	I _{MPP}	5.54 A	5.69 A	5.84 A
Short circuit current approx.	I _{SC}	5.99 A	6.09 A	6.18 A

At an incident solar irradiance level of 200 W/m² and 25°C, efficiency is decreased by approx. 7% compared with the efficiency measured at STC.

Temperature data

Temperature coefficient voltage	T _K (U _{OC})	-72 mV/K
Temperature coefficient current	T _K (I _{SC})	5.45 mA/K
NOCT		48°C +/- 2K

Further information

Connection technology	Lumberg system: 1.2 m connecting cable 4 mm ² with overmolded plug and chassis socket (for frameless modules 2 m cable length)
High voltage test	test voltage 3200 V _{DC} /max. 60µA
Hail resistance**	up to 25 mm diameter at 23 m/s
Storm resistance**	Wind speed up to 130 km/h = 800 Pa and safety factor 3
Snow load**	without frame: 2400 Pa Δ 245 kg/m ²
Load capacity according to IEC 61215	with frame: 5400 Pa Δ 550 kg/m ²


* (+/- 5% tolerance of measurement)

** in combination with our patented Profilink mounting system and the indicated attachment points (AP)


Subject to technical modifications and appropriate post-certification without prior notice

Warranty on electrical performance, 25 years according to our additional terms of warranty, which we will be glad to send you.


Certified by VDE according to DIN EN ISO 9001; Reg.Nr. 5002983/QM/11.2003 / DIN EN ISO 14001; Reg.Nr. 5002983/UM/11.2003



Efficient mounting system Profilink



Module assembly:
Panel construction: Specially hardened low-iron glass/light-permeable ethyl-vinyl acetate (EVA) film/solar cells/EVA/backing film.

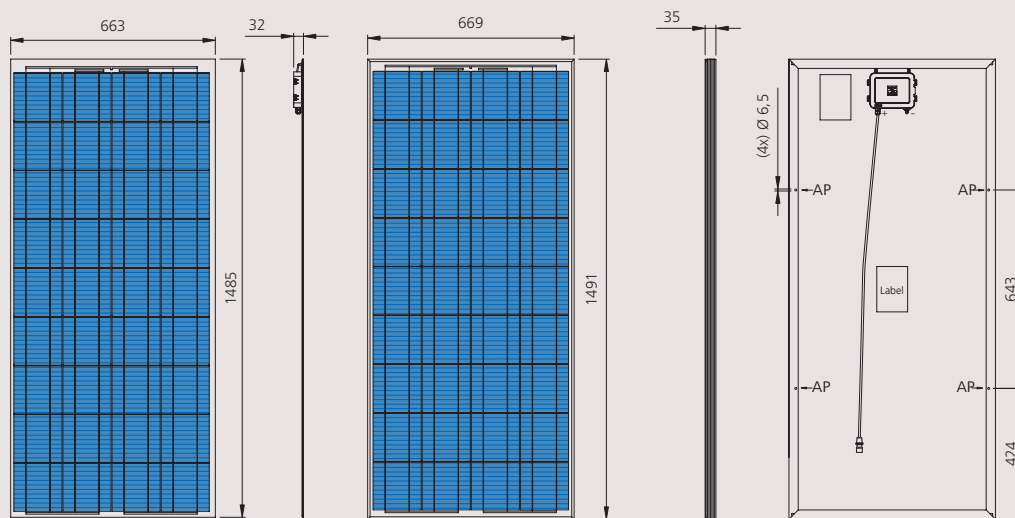

SF 130/2 without frame

SF 130/2A framed



Solar-Fabrik AG
Munzinger Str. 10
79111 Freiburg / Germany
Tel. +49-(0)761-4000-0
Fax +49-(0)761-4000-199
www.solar-fabrik.de